
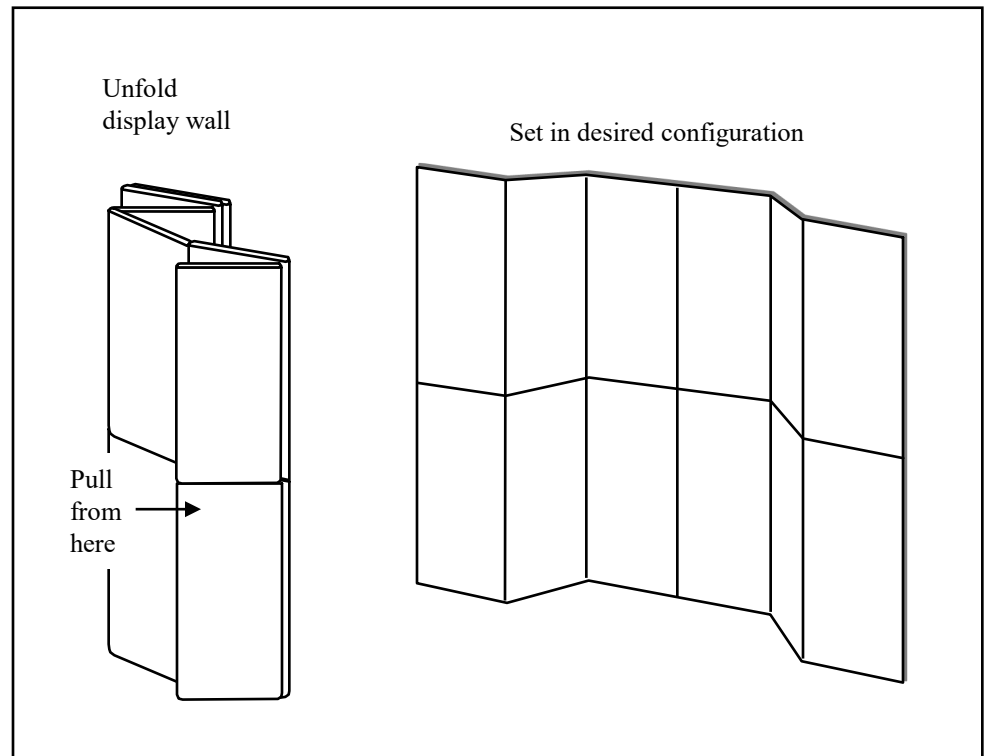


1

Intro Folding Panel System

12 Panel Display Backwall Set-up Instructions

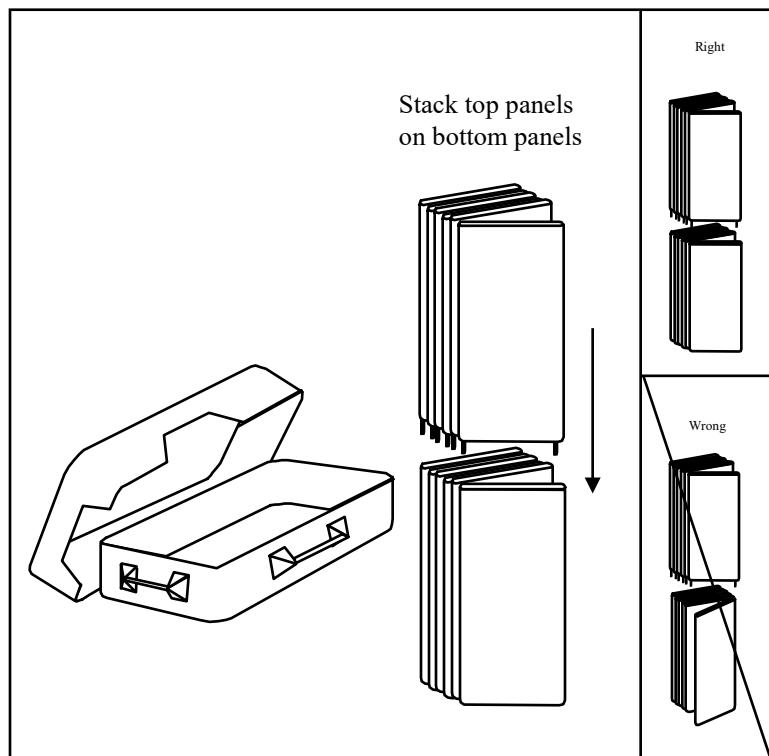


1.

Remove each folded sections from case or cases. Stand bottom section up (the unit with adjustable feet) with adjustable feet down. Lift top section up (the unit with pegs) pegs down and slide into receiving holes in bottom section. NOTE: Make sure panels are folded the same way (see diagrams).

2.


Slowly unfold unit by pulling on the bottom panels while supporting the top with your other hand while forming into desired configuration.

10 Panel Display Backwall Set-up Instructions

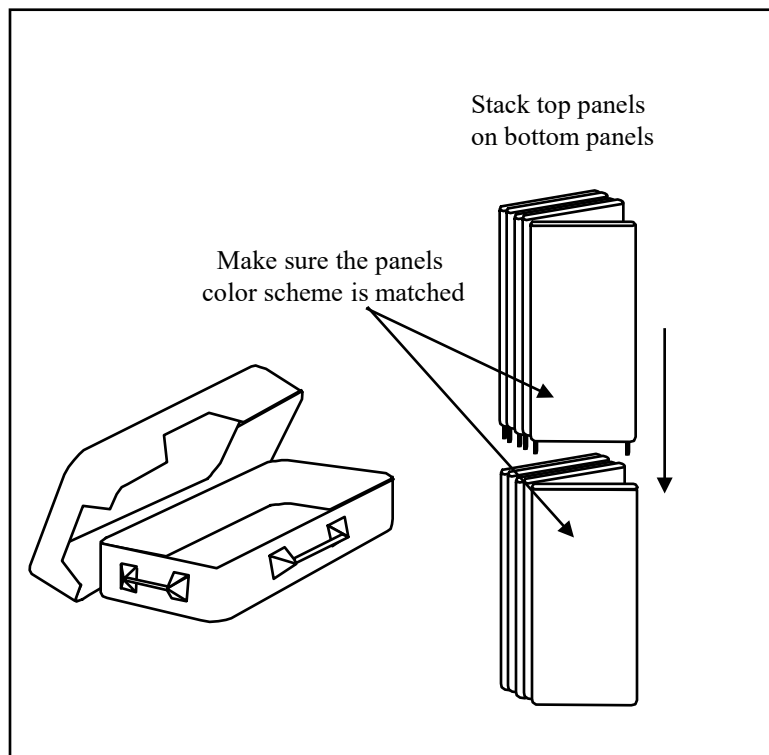

1.


Remove each folded section from case or cases. Stand bottom section up (the unit with adjustable feet) with feet down. Lift top section up (the unit with pegs) pegs down and slide into receiving holes in bottom section. NOTE: Make sure panels are folded the same way (see diagrams).

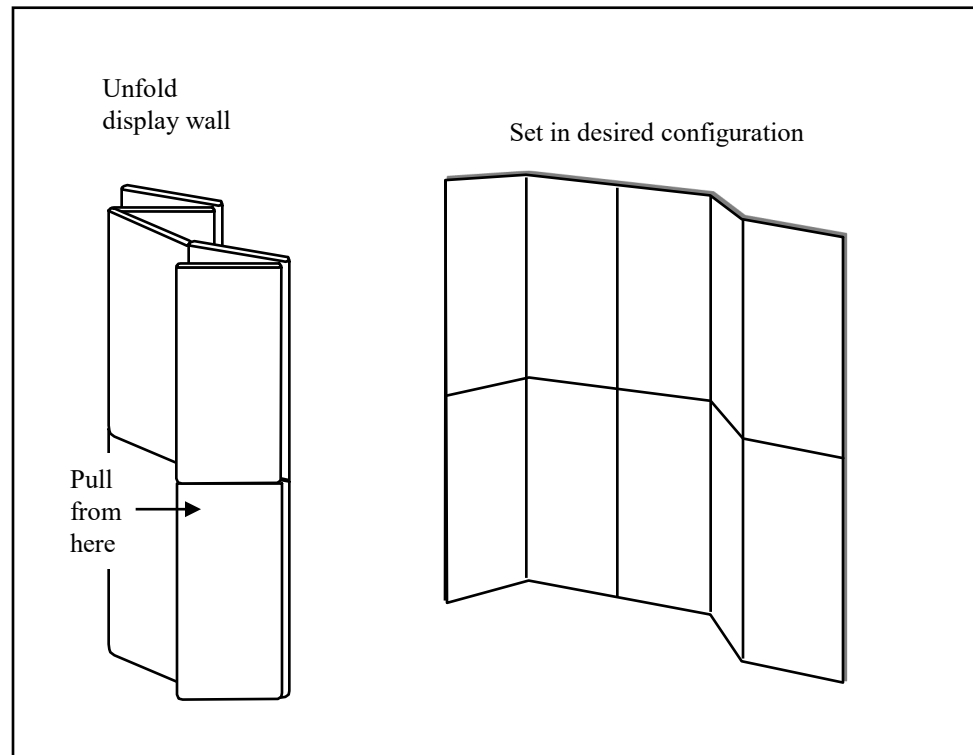

2.


Slowly unfold unit by pulling on the bottom panels while supporting the top with your other hand while forming into desired configuration.

8 Panel Display Backwall Set-up Instructions

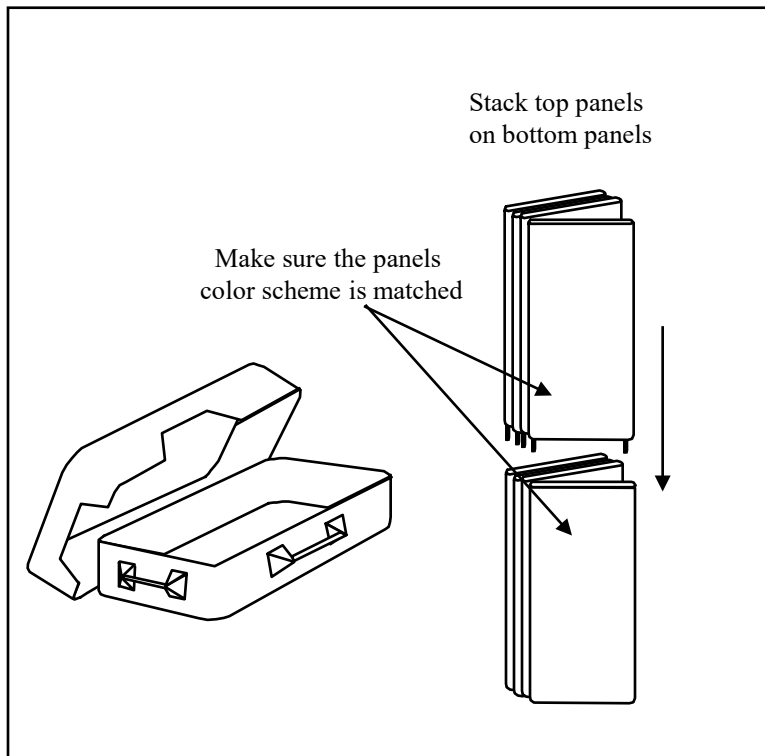

1.


Remove each folded section from case or cases. Stand bottom section up (the unit with adjustable feet) with feet down. Lift top section up (the unit with pegs) pegs down and slide into receiving holes in bottom section. NOTE: Make sure panels are folded the same way (see diagrams).

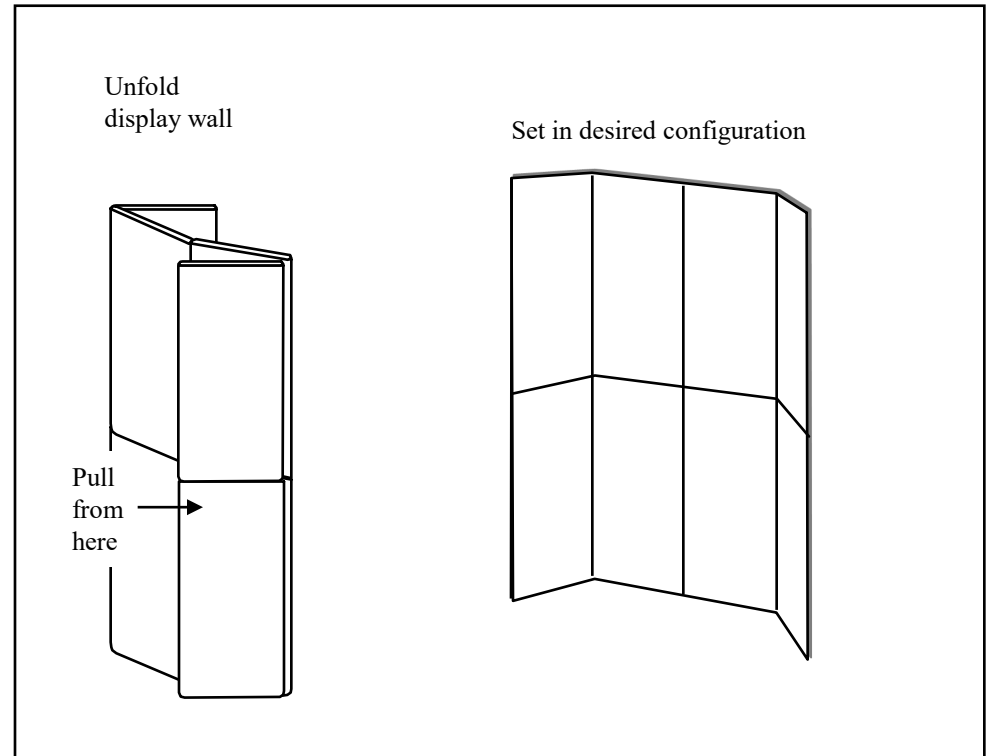

2.

Slowly unfold unit by pulling on the bottom panels while supporting the top with your other hand while forming into desired configuration.

Tower Set-up Instructions

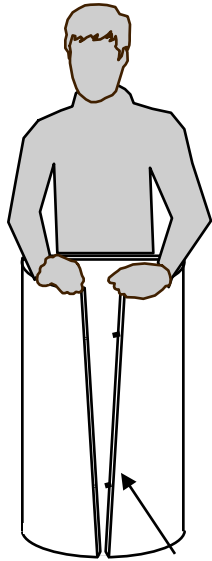

Slide bottom
pins in first




Lay upper panels
flat to insert panel
connectors

1.

Place bottom section on the floor and from the rear connect the flexible panels by guiding the pins into the receiving holes (align bottom hole then top). Then lay top panels flat and insert metal channel connectors.

2.


Attach panel tie connectors to inside of bottom curved panels by placing Velcro strip on inner top of bottom panels. Then guide top panels into bottom panels.

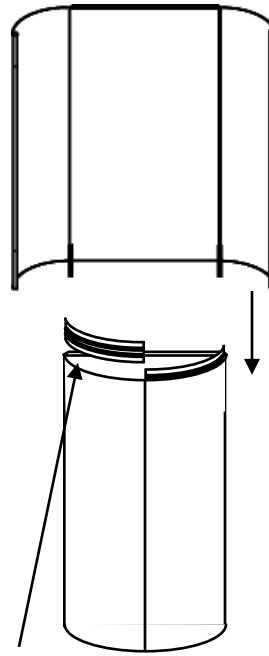


Panel seam connectors

3.


Standing from the front, connect top flexible panels the same as in Step 1 (bottom pin first). Securing Velcro as the panels close together.

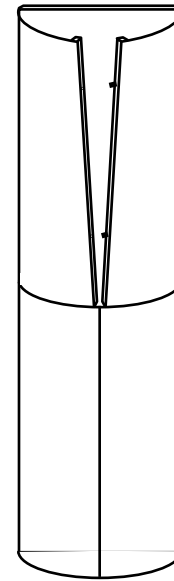


Bridge Header Set-up Instructions #1 of 2

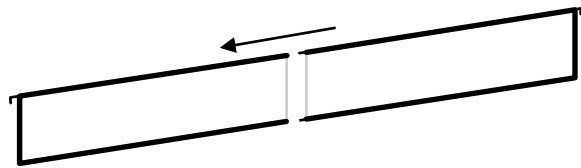

Slide header panels together

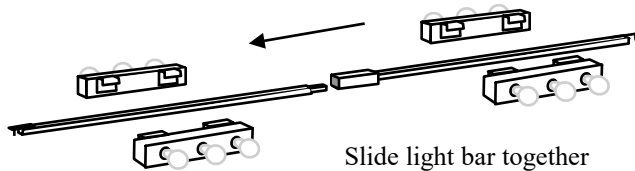

Slide light bar together

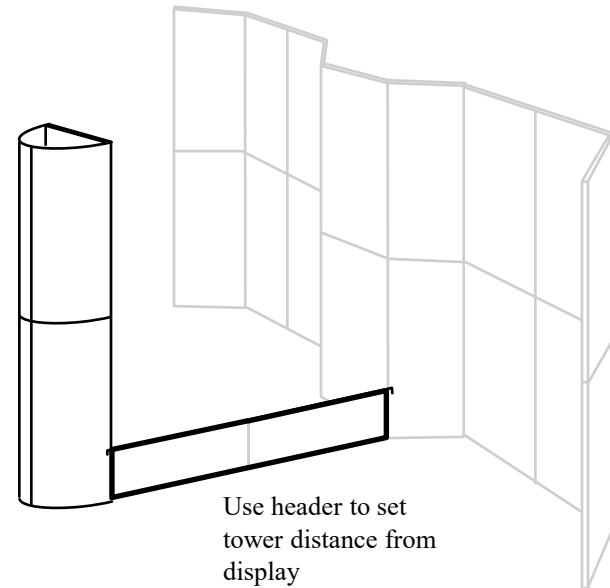Use header to set
tower distance from
display

1.

Slide header panels together and lock with thumb screws on top and Allen wrench on bottom. Then slide utility bar together.

2.


Space tower from display with header and ceiling panels.

NOTE: If it fits when you lay it out on the floor, it will fit when the headers are up and the ceiling is set into place. Thus, make sure panels are squared up on the floor before installing into final position.


Bridge Header Set-up Instructions #2 of 2

3.

Insert light bar in the top middle hole of display and tower panels.

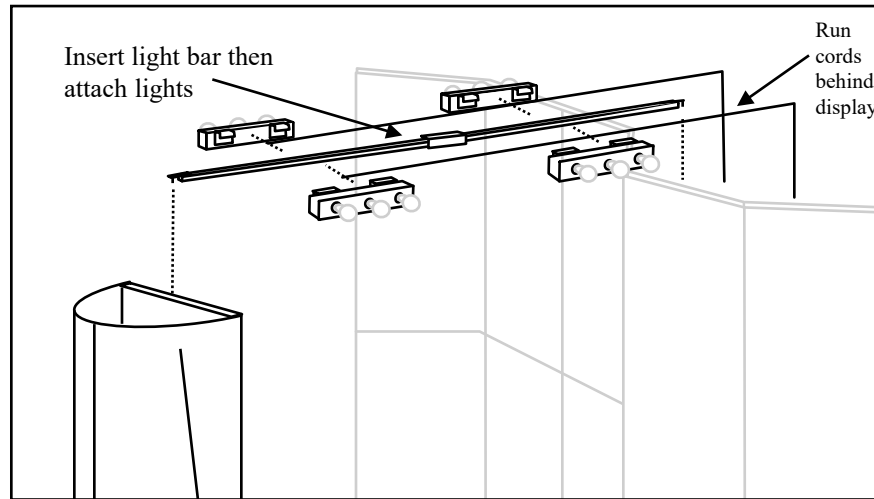

Top of Display Wall

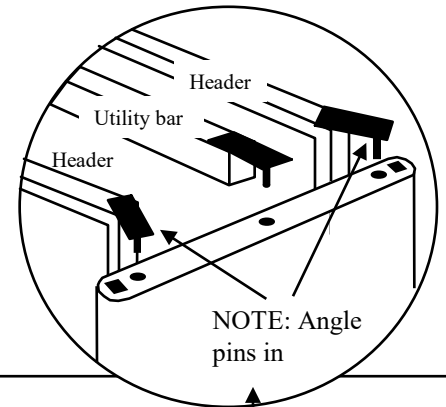

4.

Insert header panels in top left and right holes of display and tower panels. NOTE: Pins angle **out** on tower unit panel and **in** on display wall panel. Then insert light diffuser panels by hooking clips into channel on bottom inside of header panels.

