

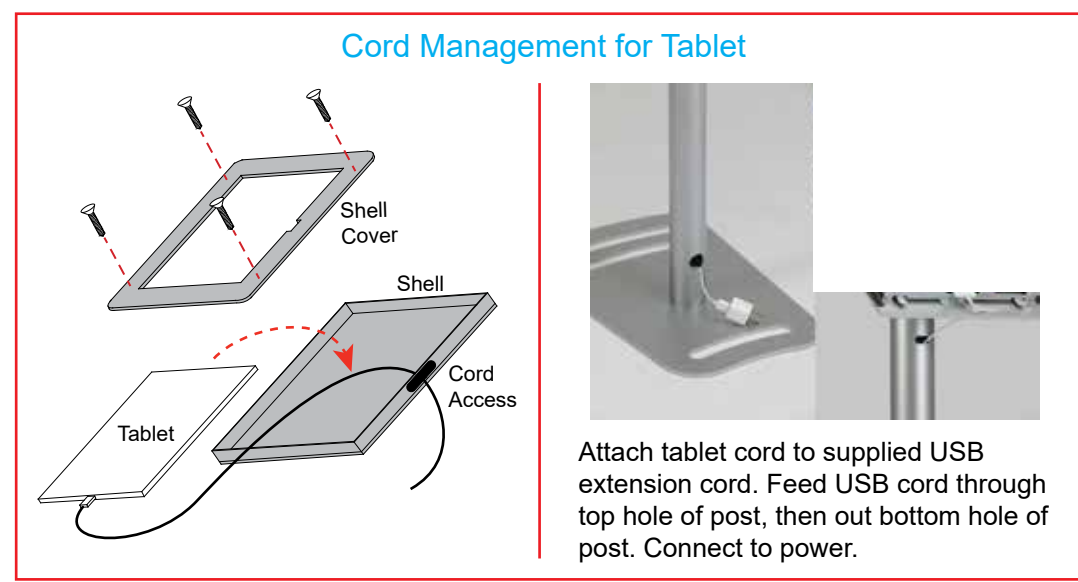
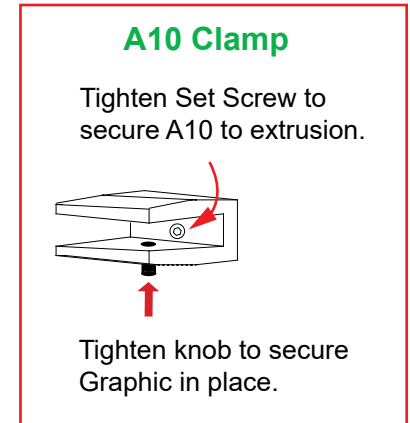


Steps:

- 1) Attach base to post, using bolt.
- 2) Attach mount plate to post, using set screw.
NOTE: Mount plate must rotate left and right, before installing shell.
- 3) Attach shell to mount plate, using hex nuts.
- 4) Attach graphics to A10 clamps. See **A10 Clamp** detail.
- 5) Insert tablet in shell and feed cords through holes.
See **Cord Management for Tablet** details.

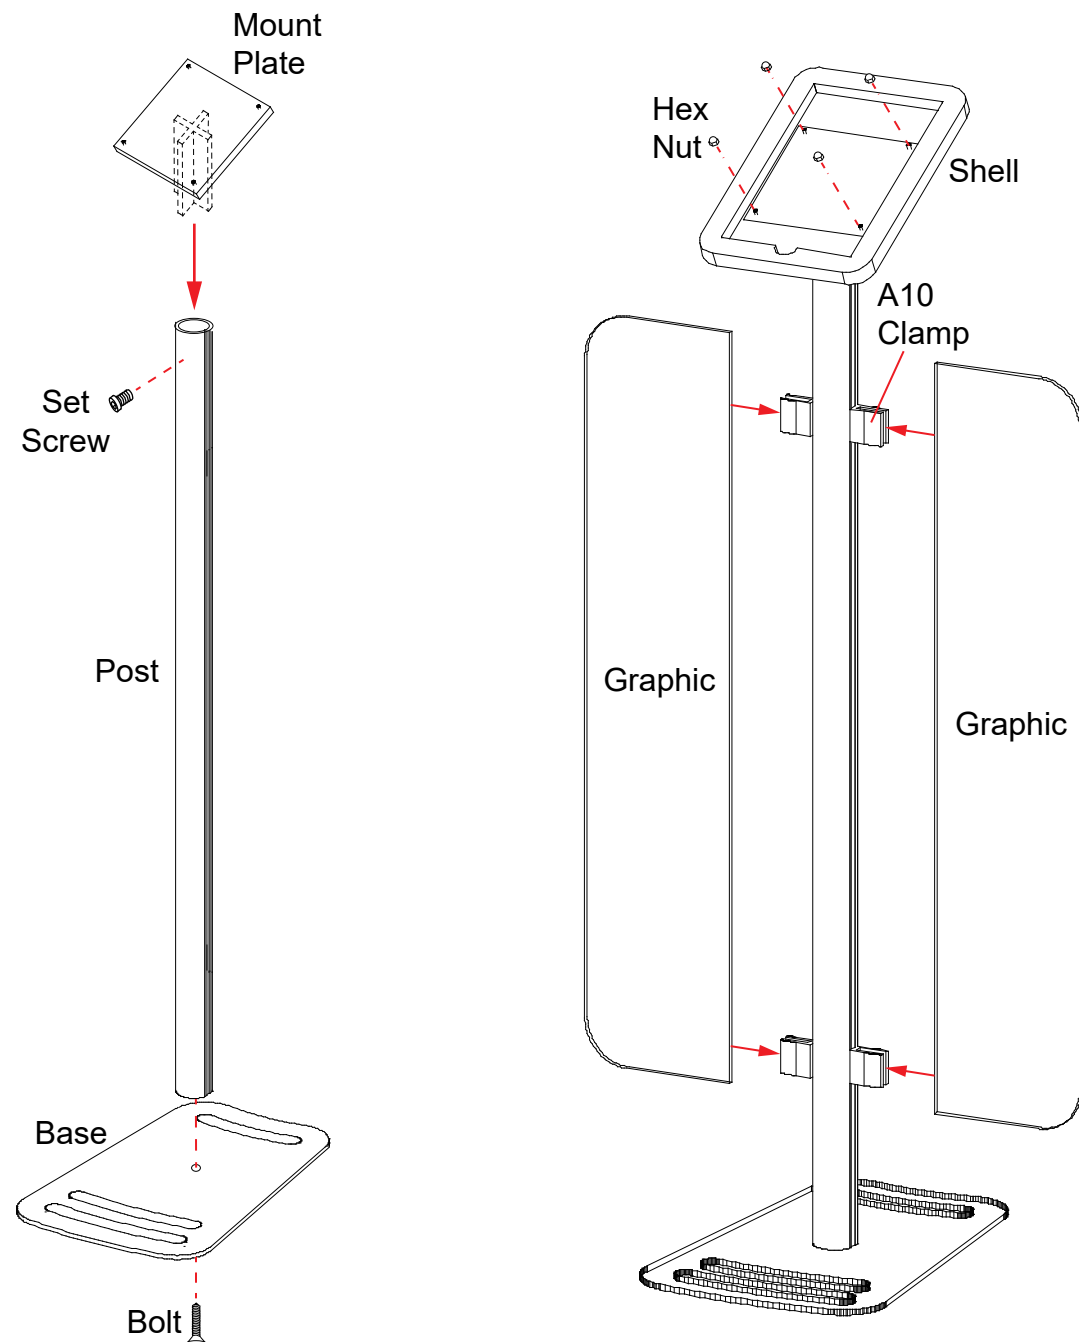

Rotate shell to turn tablet from portrait to landscape orientation.

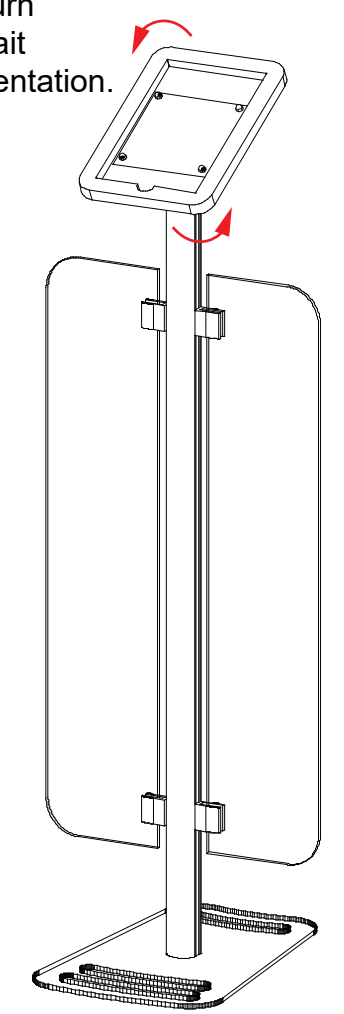

Completed Assembly

SETUP INSTRUCTIONS

General Setup Instructions


- Read entire setup instruction manual prior to unpacking parts and pieces.
- The setup instructions are created specifically for this configuration.
- Setup instructions are laid out sequentially in steps, including exploded views with detailed explanation for assembly.

Cleaning & Packing


- For Cleaning Metal, Plex, & Laminate Parts:
Use a **MILD NON-ABRASIVE** cleanser and soft cloth/paper towel to clean all surfaces.
- Keep exhibit components away from heat and prolonged sun exposure.
Heat and UV exposure will warp and fade components.
- Retain all provided Packing Materials.
All provided packing materials are for ease of repacking & component protection.

Disassembly


- For loss prevention, tighten all set screws and locks during disassembly.

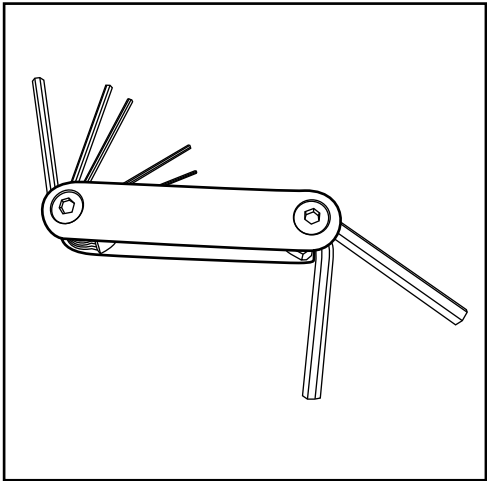


Hex Tool - Essential for Assembly

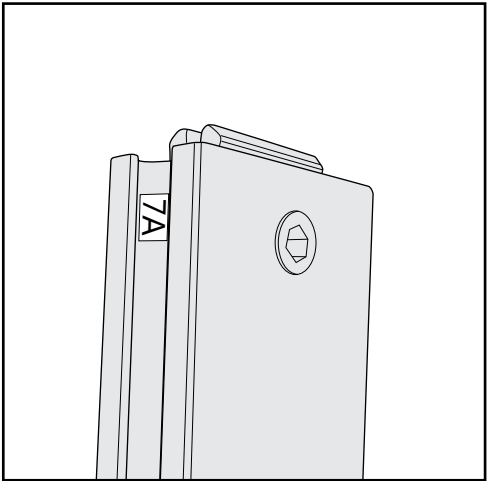


Part Identification - Numbering

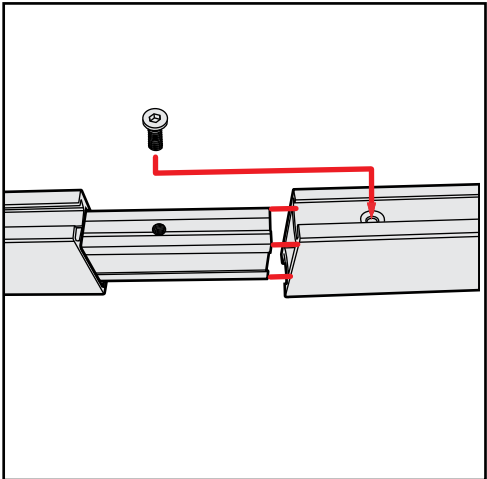


Spline Connection

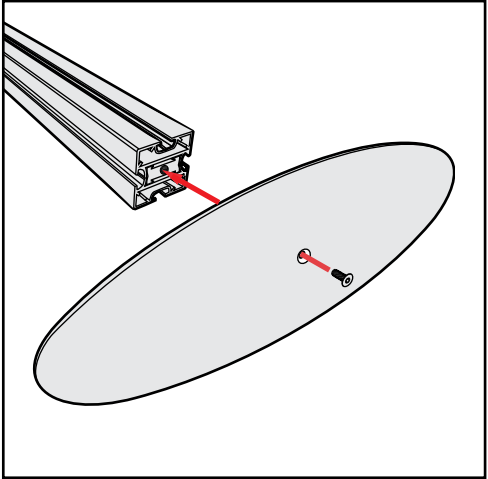

Base Plate & Extrusion Connection

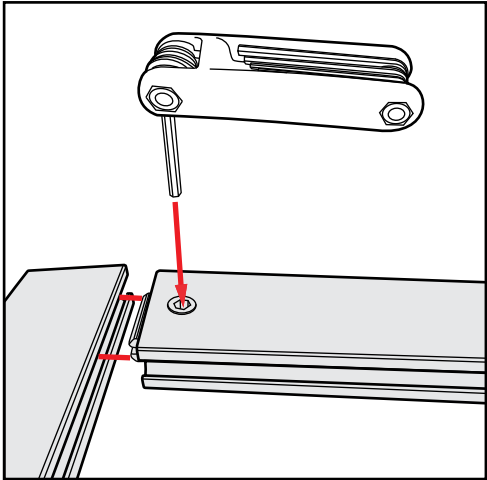

Extrusion & Lock Connection

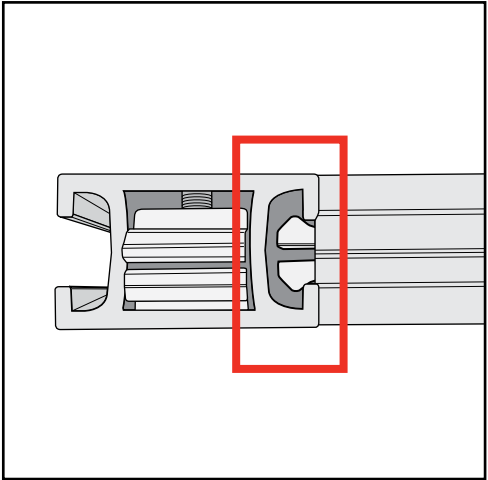


Engaged Lock



WARNING



DO NOT USE POWER TOOLS



LADDERS OR LIFTS
MAY BE REQUIRED



ALL CONNECTIONS MUST
BE TIGHTLY SECURED